

HBF HINGED STOP COLLAR WITH DRAW BOLT

ENGINEERING SOLUTIONS FOR ONSHORE WELLS

Draw bolt fitted stop collar for quick installation in onshore wells. The HBF is developed to complement our range of hinged centralizers for vertical and horizontal sections.



Made from the same material as our centralizers, the HBF is developed for use in less deviated wells.

The holding action of the draw bolt tightening mechanism provides strong hold without damaging the casing. The HBF is recommended for use with all standard casing grades.

CENTRALIZERS

HBF stop collars are developed as counterparts to Centek's centralizers for less challenging onshore wells.


FEATURES AND BENEFITS

- Centek QA
- Quick and secure installation
- Friction grip does not damage casing
- For use with standard casing grades

TARGET APPLICATIONS

- Onshore wells
- Horizontal, vertical and deviated sections

PERFORMANCE RATINGS

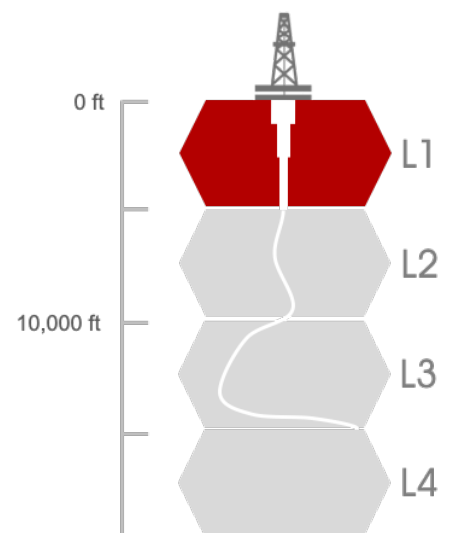















CORE PRODUCT SIZING*

PART NUMBER		PART NUMBER	
Product size	Stop Collar	Product	Stop Collar
3 1/2" ID	0300-HBF	13 3/8" ID	1338-HBF
4 1/2" ID	0412-HBF	13 5/8" ID	1358-HBF
5" ID	0500-HBF	14" ID	1400-HBF
5 1/2" ID	0512-HBF	16" ID	1600-HBF
7" ID	0700-HBF	18 5/8" ID	1858-HBF
7 5/8" ID	0758-HBF	20" ID	2000-HBF
9 5/8" ID	0958-HBF	22" ID	2200-HBF
9 7/8" ID	0978-HBF	24" ID	2400-HBF
10 3/4" ID	1034-HBF		

*custom sizes are available. Speak to your sales representative for more information.

FULL STRING SOLUTION – STOP COLLARS

WELL TYPE	ONSHORE			ONSHORE + OFFSHORE			
WELL LEVEL	L1 + L2		L2	(L1 + L2) + L3 + L4			
PRODUCT NAME	HSN	HBF	OSO	OOSO	OOSH	HDSO	HDSH
DESCRIPTION	Hinged stop collar with spiral nail	Hinged stop collar with draw bolt	Slip on stop collar with set screws	Slip on stop collar with set screws	Hinged, stop collar with set screws	Heavy duty, slip on stop collar with set screws	Hinged, heavy duty stop collar with set screws
RUNABILITY (0-8)							
STRENGTH (0-8)							

For more information talk to our Global Sales team today or use our Product Selector Tool to find the right product for your application – sales@centekgroup.com

Centek Inc, 5500 S.W. 36th Street, Oklahoma City, OK 73179 +1 405 219 3200

Centek Ltd, Station View, Brunel Industrial Estate, Newton Abbot, Devon TQ12 4AE +44 (0) 1626 337636